



Wall-mounted air conditioner **Versu Cloth**

74

Versu Cloth we created for those, who are looking for their own way.

The interchangeable textile panels, perfectly adhering to the front of the air conditioner, is an uninhibited play with color and a sensual experience of pleasant texture to the touch.


Versu Cloth is a year-round unit with the highest Energy efficiency class, cooling A+++. It's also quiet operation - the unit's volume is only 19 dB in the lowest gear, as well as a cascading air supply, which is mediated by a 180° rotating horizontal louvre.

With Versu Cloth you will create an arrangement in which all elements and decorations will be a stylistically coherent whole.

The warm golden shade of the Cloth Caramel case with the caramel color of the Panel will appeal to lovers of warm, nature-inspired tones. Versu Cloth Stone by contrast, is a variation on silver and gray created for modern, subdued interiors.



TEXTILE
INTERCHANGEABLE
FRONT PANELS

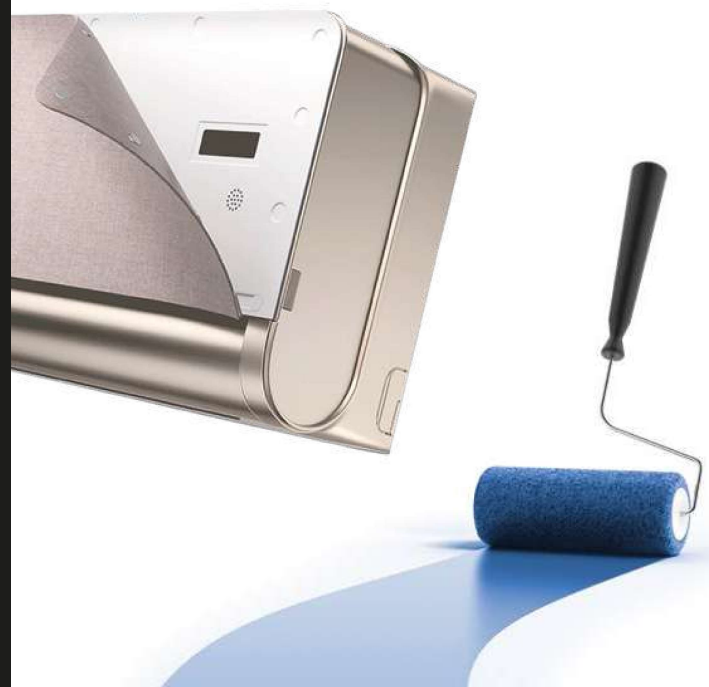

VERSU CLOTH



Textile interchangeable front panels

Textile changeable front panel, available in up to 9 different colours, allows you to customize the design of the air conditioner to fit any room at any time.



Volume only 19 dB

The unit can operate in super eMOTO Silent mode, so it does not disturb your rest.



Automatic 4D louvres

Built-in actuators allow you to control the operation of vertical and horizontal blinds with a remote control or wall-mounted controller. This guarantees the highest level of operating comfort and ensures efficient air distribution in the room.



Rotating louvre 180°

The horizontal rotating louvre allows you to precise air supply in any direction within 180° up/down.



Super iAIR Ionizer

By creating negative oxygen ions, Super Ionizer iAIR eliminates viruses, bacteria, dust mites and allergens from the air. Unpleasant odours are removed practically as soon as the ionizer comes into contact with the contaminated air.



Heating at down to -22°C

The technology used and the built-in year-round operation package enable efficient operation of the air conditioner even in extreme weather conditions. The air conditioner will effectively heat the room even at low outdoor temperatures

QUICK CHANGE
OF INTERIOR
DESIGN?




Versu Cloth Caramel with Rose Panel

No problem!

VERSU CLOTH STONE

76

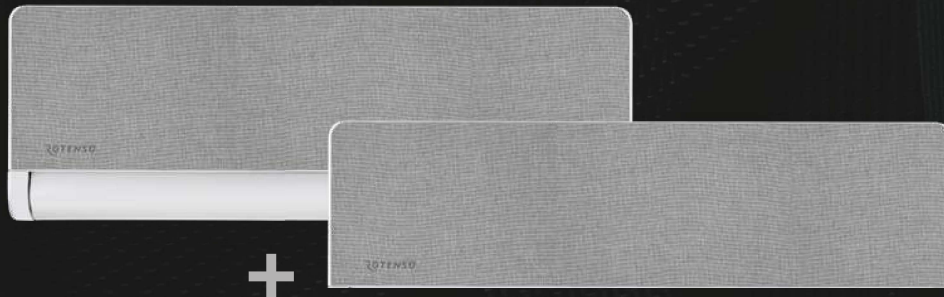

PANEL INCLUDED - STONE

VERSU CLOTH CARMEL



PANEL INCLUDED - CARMEL



Versu Cloth Stone

Versu Cloth Caramel

INTERCHANGEABLE TEXTILE MAGNETIC PANELS


COLOR VERSIONS OF THE TEXTILE INTERCHANGEABLE PANELS:



Marine



Desert



Storm



Rose



Coral



Mint



Chrome



Caramel



Stone

Magnetic panel colours in print may differ from actual colours.



Easy replacement




Waterproof,
stain resistant

FULL CONTROL 180° AIR SUPPLY


9 8 7 6



AIR SUPPLY
cascade
downwards

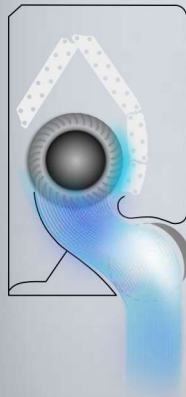

range
up to **9m**

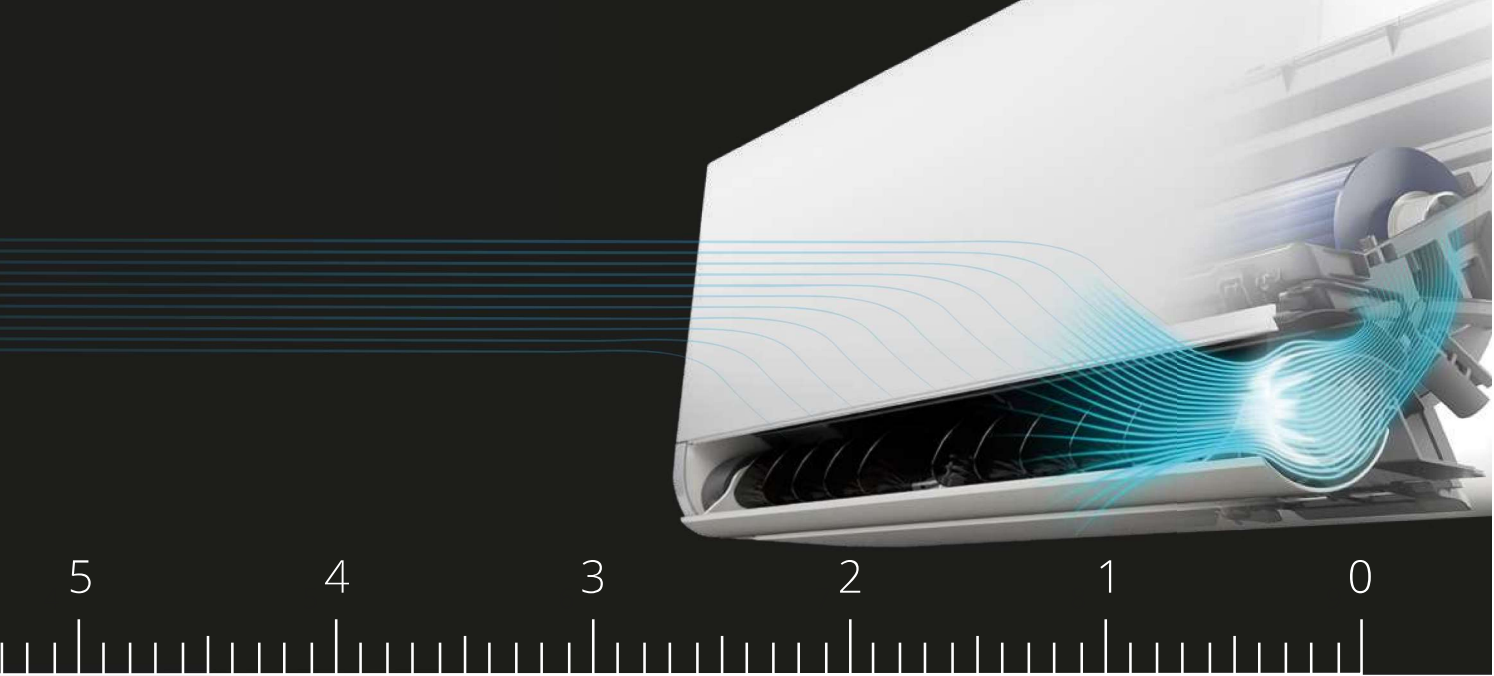

AIR SUPPLY
cascade
upwards



Versu Cloth Stone

2,6-5,3 kW



S-LINE

HP-LINE



Features device

80



Digital DC Inverter SKY*



Textile changeable front panel



Automatic Purification iClean ⁽¹⁾



Super Ionizer iAIR



3-in-1 filter (Si.Ion + Ca + Nano) iAIR ⁽¹⁾



Antibacterial HEPA iAIR filter



Electrostatic HD iAIR filter



Super Silent eMOTO mode ⁽¹⁾



Automatic 4D louvers



Rotating louvre 180°



Turbo eMOTO mode ⁽¹⁾



Upwards cascade air supply



Downwards cascade air supply



Air supply control system eMOTO



ECO eMOTO mode ⁽¹⁾



Wide angle eMOTO air supply



Humidity sensor ⁽¹⁾⁽³⁾



SMART Wi-Fi



SMART port wired controller ⁽²⁾



Smart panel display ON/OFF



SMART Follow mode



Wireless remote controller



Wired controller ⁽²⁾



SMART heating to 8°C ⁽¹⁾



Louvre setting memory



1W standby mode ⁽¹⁾



Auto restart memory



Anti-corrosive gold fins



Drip tray heater



Compressor crankcase heater



Silence mode



Timer



Cooling at low outdoor temp. down to -15°C



Heating at low outdoor temp. down to -22°C



Double-sided condensate drainage



Self-diagnostics



Sleep mode



BMS Modbus ⁽²⁾



BMS Bacnet ⁽²⁾

1. Feature not available in Multi Split system. 2. Feature is only optional. 3. Feature can be accessed via mobile app.

* Silver Ion + Photocatalytic + Cold Nano

Technical specification

Model				Versu Cloth Stone 2,6 kW	Versu Cloth Stone 3,5 kW	Versu Cloth Stone 5,3 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (1231-3297)	3516 (1320-4307)	5275 (1817-6008)
Rated input		Nom. (Min. - Max.)	W	600 (100-1260)	900 (130-1650)	1600 (140-2300)
Operating current		Nom. (Min. - Max.)	A	2,6 (0,4-5,5)	3,9 (0,6-7,2)	7,0 (0,6-10,0)
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (847-3722)	3809 (879-4395)	5568 (1260-6154)
Rated input		Nom. (Min. - Max.)	W	623 (110-1320)	950 (120-1500)	1680 (220-2350)
Operating current		Nom. (Min. - Max.)	A	2,7 (0,5-5,7)	4,1 (0,5-6,5)	7,3 (1,0-10,2)
Reversible heat pump type				air-to-air	air-to-air	air-to-air
Design load in cooling mode			kW	2,6	3,5	5,3
SEER			W/W	8,8	8,5	6,3
Energy efficiency class - cooling				A+++	A+++	A++
Annual electric energy consumption - cooling			kWh/a	103	146	294
Design load in heating mode (Tbiv -7°C)			kW	2,5	2,5	4,1
SCOP			W/W	4,6	4,6	4,1
Energy efficiency class - heating				A++	A++	A+
Annual electric energy consumption - heating			kWh/a	776	776	1435
Dehumidification			l/h	1,0	1,2	1,8
Maximum energy consumption			W	2200	2200	2500
Maximum operating current			A	9,6	9,6	10,9
Indoor unit				VCS26Xi	VCS35Xi	VCS50Xi
EAN product code				5905567601026	5905567601088	5905567601095
Fan speed	T / H / M / L / ML / S	rpm	1122 / 910 / 823 / 710 / 652 / 600	1122 / 910 / 823 / 710 / 652 / 600	1150 / 970 / 880 / 800 / 760 / 670	
Air flow	T / H / M / L / ML / S	m³/h	700 / 555 / 445 / 380 / 270 / 230	700 / 555 / 445 / 380 / 270 / 230	750 / 590 / 490 / 410 / 330 / 280	
Sound pressure level	T / H / M / L / ML / S	dB(A)	40 / 32 / 27 / 24 / 21 / 19	40 / 32 / 27 / 24 / 21 / 19	41 / 36 / 30 / 28 / 24 / 19	
Sound power level		dB(A)	53	53	54	
Rated input		W	23	23	23	
Operating current		A	0,1	0,1	0,1	
Net dimensions	W × D × H	mm	920 × 211 × 321	920 × 211 × 321	920 × 211 × 321	
Gross dimensions	W × D × H	mm	1005 × 295 × 385	1005 × 295 × 385	1005 × 295 × 385	
Net weight / Gross weight		kg	11,3 / 14,2	11,3 / 14,2	11,5 / 14,4	
Condensate drain		mm	16	16	16	
Outdoor unit				VO26Xo	VO35Xo	VO50Xo
EAN product code				5905567606649	5905567606663	5905567606687
Fan speed	H / M / L	rpm	800 / 620 / 450	800 / 620 / 450	760 / 650 / 490	
Maximum air flow		m³/h	2200	2200	2100	
Sound pressure level		dB(A)	53	53	54	
Sound power level		dB(A)	58	62	63	
Net dimensions	W × D × H	mm	765 × 303 × 555	765 × 303 × 555	805 × 330 × 554	
Gross dimensions	W × D × H	mm	887 × 337 × 610	887 × 337 × 610	915 × 370 × 615	
Bracket spacing	W × D	(mm)	452 × 286	452 × 286	511 × 317	
Net weight / Gross weight		kg	26,4 / 28,8	26,4 / 28,8	33,5 / 36,1	
Refrigerant	Type		R32	R32	R32	
	GWP*		675	675	675	
	Charged (≤ 5m)	kg	0,7	0,7	1,1	
		TCO ₂ eq	0,472	0,472	0,74	
Charged (> 5m)	g/m	12	12	12		
Pipe connections	Liquid / Gas	mm (inch)	Φ6,35 / Φ9,52 (1/4" / 3/8")	Φ6,35 / Φ9,52 (1/4" / 3/8")	Φ6,35 / Φ12,7 (1/4" / 1/2")	
Maximum installation length			m	25	25	30
Maximum height difference			m	10	10	20
Compressor type				Rotary DC	Rotary DC	Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f	220-240-50, 1f	220-240-50, 1f
Current protection			A	B10	B10	B16
Power cables: outdoor unit	L < 20m	pcs × mm²	3 × 1,5	3 × 1,5	3 × 1,5	
Control and power cables: indoor unit - outdoor unit			pcs × mm²	5 × 1,5	5 × 1,5	5 × 1,5
Control and power cables: hiro unit - indoor unit			pcs × mm²	4 × 1,5	4 × 1,5	4 × 1,5
Indoor operating range (cooling / heating)			°C	16-32 / 0-30	16-32 / 0-30	16-32 / 0-30
Outdoor operating range (cooling / heating)			°C	-15-50 / -22-30	-15-50 / -22-30	-15-50 / -22-30
Compatible systems						
1:1 SINGLE				●	●	●
1:2 DUAL						
1:X MULTI S-LINE				●	●	●
1:X MULTI N-LINE						
1:X MULTI HP-LINE				●	●	●

Versu Cloth Caramel

2,6-5,3 kW



Features device

82



Digital DC Inverter SKY*



Textile changeable front panel



Automatic Purification iClean⁽¹⁾



Super Ionizer iAIR



3-in-1 filter (SiIon + Ca + Nano) iAIR⁽¹⁾



Antibacterial HEPA iAIR filter



Electrostatic HD iAIR filter



Super Silent eMOTO mode⁽¹⁾



Automatic 4D louvers



Rotating louvre 180°



Turbo eMOTO mode⁽¹⁾



Upwards cascade air supply



Downwards cascade air supply



Air supply control system eMOTO



ECO eMOTO mode⁽¹⁾



Wide angle eMOTO air supply



Humidity sensor⁽¹⁾⁽³⁾



SMART Wi-Fi



SMART port wired controller⁽²⁾



Smart panel display ON/OFF



SMART Follow mode



Wireless remote controller



Wired controller⁽²⁾



SMART heating to 8°C⁽¹⁾



Louvre setting memory



1W standby mode⁽¹⁾



Auto restart memory



Anti-corrosive gold fins



Drip tray heater



Compressor crankcase heater



Silence mode



Timer



Cooling at low outdoor temp. down to -15°C



Heating at low outdoor temp. down to -22°C



Double-sided condensate drainage



Self-diagnostics



Sleep mode



BMS Modbus⁽²⁾



BMS Bacnet⁽²⁾

1. Feature not available in Multi Split system. 2. Feature is only optional. 3. Feature can be accessed via mobile app.

* Silver Ion + Photocatalytic + Cold Nano

Technical specification

Model				Versu Cloth Caramel 2,6 kW	Versu Cloth Caramel 3,5 kW	Versu Cloth Caramel 5,3 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (1231-3297)	3516 (1320-4307)	5275 (1817-6008)
Rated input		Nom. (Min. - Max.)	W	600 (100-1260)	900 (130-1650)	1600 (140-2300)
Operating current		Nom. (Min. - Max.)	A	2,6 (0,4-5,5)	3,9 (0,6-7,2)	7,0 (0,6-10,0)
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (847-3722)	3809 (879-4395)	5568 (1260-6154)
Rated input		Nom. (Min. - Max.)	W	623 (110-1320)	950 (120-1500)	1680 (220-2350)
Operating current		Nom. (Min. - Max.)	A	2,7 (0,5-5,7)	4,1 (0,5-6,5)	7,3 (1,0-10,2)
Reversible heat pump type				air-to-air	air-to-air	air-to-air
Design load in cooling mode			kW	2,6	3,5	5,3
SEER			W/W	8,8	8,5	6,3
Energy efficiency class - cooling				A+++	A+++	A++
Annual electric energy consumption - cooling			kWh/a	103	146	294
Design load in heating mode (Tbiv -7°C)			kW	2,5	2,5	4,1
SCOP			W/W	4,6	4,6	4,1
Energy efficiency class - heating				A++	A++	A+
Annual electric energy consumption - heating			kWh/a	776	776	1435
Dehumidification			l/h	1,0	1,2	1,8
Maximum energy consumption			W	2200	2200	2500
Maximum operating current			A	9,6	9,6	10,9
Indoor unit				VCC26Xi	VCC35Xi	VCC50Xi
EAN product code				5905567601019	5905567601033	5905567601057
Fan speed	T / H / M / L / ML / S	rpm	1122 / 910 / 823 / 710 / 652 / 600	1122 / 910 / 823 / 710 / 652 / 600	1150 / 970 / 880 / 800 / 760 / 670	
Air flow	T / H / M / L / ML / S	m³/h	700 / 555 / 445 / 380 / 270 / 230	700 / 555 / 445 / 380 / 270 / 230	750 / 590 / 490 / 410 / 330 / 280	
Sound pressure level	T / H / M / L / ML / S	dB(A)	40 / 32 / 27 / 24 / 21 / 19	40 / 32 / 27 / 24 / 21 / 19	41 / 36 / 30 / 28 / 24 / 19	
Sound power level		dB(A)	53	53	54	
Rated input		W	23	23	23	
Operating current		A	0,1	0,1	0,1	
Net dimensions	W × D × H	mm	920 × 211 × 321	920 × 211 × 321	920 × 211 × 321	
Gross dimensions	W × D × H	mm	1005 × 295 × 385	1005 × 295 × 385	1005 × 295 × 385	
Net weight / Gross weight		kg	11,3 / 14,2	11,3 / 14,2	11,5 / 14,4	
Condensate drain		mm	16	16	16	
Outdoor unit				VO26Xo	VO35Xo	VO50Xo
EAN product code				5905567606649	5905567606663	5905567606687
Fan speed	H / M / L	rpm	800 / 620 / 450	800 / 620 / 450	760 / 650 / 490	
Maximum air flow		m³/h	2200	2200	2100	
Sound pressure level		dB(A)	53	53	54	
Sound power level		dB(A)	58	62	63	
Net dimensions	W × D × H	mm	765 × 303 × 555	765 × 303 × 555	805 × 330 × 554	
Gross dimensions	W × D × H	mm	887 × 337 × 610	887 × 337 × 610	915 × 370 × 615	
Bracket spacing	W × D	(mm)	452 × 286	452 × 286	511 × 317	
Net weight / Gross weight		kg	26,4 / 28,8	26,4 / 28,8	33,5 / 36,1	
Refrigerant	Type		R32	R32	R32	
	GWP*		675	675	675	
	Charged (≤ 5m)	kg	0,7	0,7	1,1	
		TCO ₂ eq	0,472	0,472	0,74	
Charged (> 5m)	g/m	12	12	12		
Pipe connections	Liquid / Gas	mm (inch)	Φ6,35 / Φ9,52 (1/4" / 3/8")	Φ6,35 / Φ9,52 (1/4" / 3/8")	Φ6,35 / Φ12,7 (1/4" / 1/2")	
Maximum installation length		m	25	25	30	
Maximum height difference		m	10	10	20	
Compressor type				Rotary DC	Rotary DC	Rotary DC
Type of outdoor unit power supply		V-Hz, Ø	220-240-50, 1f	220-240-50, 1f	220-240-50, 1f	
Current protection		A	B10	B10	B16	
Power cables: outdoor unit	L < 20m	pcs × mm²	3 × 1,5	3 × 1,5	3 × 1,5	
Control and power cables: indoor unit - outdoor unit		pcs × mm²	5 × 1,5	5 × 1,5	5 × 1,5	
Control and power cables: hiro unit - indoor unit		pcs × mm²	4 × 1,5	4 × 1,5	4 × 1,5	
Indoor operating range (cooling / heating)		°C	16-32 / 0-30	16-32 / 0-30	16-32 / 0-30	
Outdoor operating range (cooling / heating)		°C	-15-50 / -22-30	-15-50 / -22-30	-15-50 / -22-30	
Compatible systems						
1:1 SINGLE				•	•	•
1:2 DUAL						
1:X MULTI S-LINE				•	•	•
1:X MULTI N-LINE						
1:X MULTI HP-LINE				•	•	•